


|   |  |   |
|---|--|---|
|  | <b>Reolink Innovation Limited</b>  |   |
| <b>Picture</b>  |             |   |
| <b>Model</b>  | <b>Reolink TrackMix Wired LTE</b>  |   |
| <b>Video &amp; Audio</b>  | Image Sensor   | 1/3"CMOS Sensor   |
|   | Video Resolution   | UP To: 2560 x 1440 (4.0 Megapixels)@15FPS   |
|   | Lens   | f=2.8mm@F=1.6 , f=8mm@F=1.6   |
|   | Video Format   | H.264,H.265   |
|   | Field of View  | Horizontal: 96°-38°   |
|   |  | Vertical: 55°-21°   |
|   | Zoom Mode  | 6X hybrid zoom  |
|   | Infrared Night Vision  | Up to 30 Meters (100ft)(LED: 2pcs/850nm)  |
|   | Color Night Vision   | Spotlight: 2pcs/4w/6500K/450 Lumens   |
| Audio   | Two-way Audio  |   |
| <b>Power</b>  | DC Power   | DC 12V/2A   |
| <b>Interface</b>  | Power  | DC power port   |
|   | System   | Reset Button  |
|   | Ethernet   | One 10M/100Mbps RJ45  |
|   | SIM card slot  | Nano-SIM  |
|   | SD Card Slot   | MicroSD card slot (Max. 256GB)  |
|   | Audio  | Built-in Microphone and Speaker   |
| <b>Pan&amp;Tilt</b>   | Pan &Tilt  | Pan: 355°, Tilt: 0°~90°; (Speed can be set)   |
|   | Preset   | 32  |
|   | Auto Tracking  | Support   |
| <b>3G/4G</b>  | Frequency Bands  | Europe<br>LTE FDD: B1/B3/B7/B8/B20/B28A<br>WCDMA: B1/B8   |
|   |  | America<br>LTE FDD: B2/B4/B5/B12/B13/B14/B66/B71  |
|   |  | Australia<br>LTE FDD: B1/B3/B5/B7/B8/B28<br>WCDMA: B1/B5/B8   |
|   |  |   |
| <b>Software Features</b>  | Frame Rate   | Main Stream: 10fps - 15fps  |
|   |  | Sub Stream: 10fps - 15fps   |
|   | Code Rate  | Main Stream: 1024Kbps -4096Kbps   |
|   |  | Sub Stream: 64Kbps -672Kbps   |
|   | Browser Supported  | Edge, Chrome, Firefox, Safari   |
|   | OS Supported   | PC: Windows, Mac OS; Smartphone: iOS, Android   |
|   | Smart Alarm  | Motion detection/Human Detection/Vehicle Detection/Pet Detection  |
|   | Record Mode  | Motion Record/Schedule Record (Default: Motion Record)  |
| Protocols & Standards   | HTTPS, SSL, TCP/IP, UDP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P |   |
| Maximal User Access   | Support up to 12 simultaneous video streams (10 substreams & 2 mainstreams)                  |   |
| Work with   | Google Assistant, Reolink Cloud  |   |
| <b>Working Environment</b>  | Temperature  | Operating Temperature: -10°C~+55°C (14°F~131°F)   |
|   | Humidity   | Operating Humidity: 10% ~ 90%   |
|   | Waterproof   | IP65  |
| <b>Size &amp; Weight</b>  | Dimension  | 228*147*129mm   |
|   | Weight   | 1.21KG  |
| <b>Warranty</b>   | Limited Warranty   | 2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> |





\*The micro SD card and the SIM card are not included.

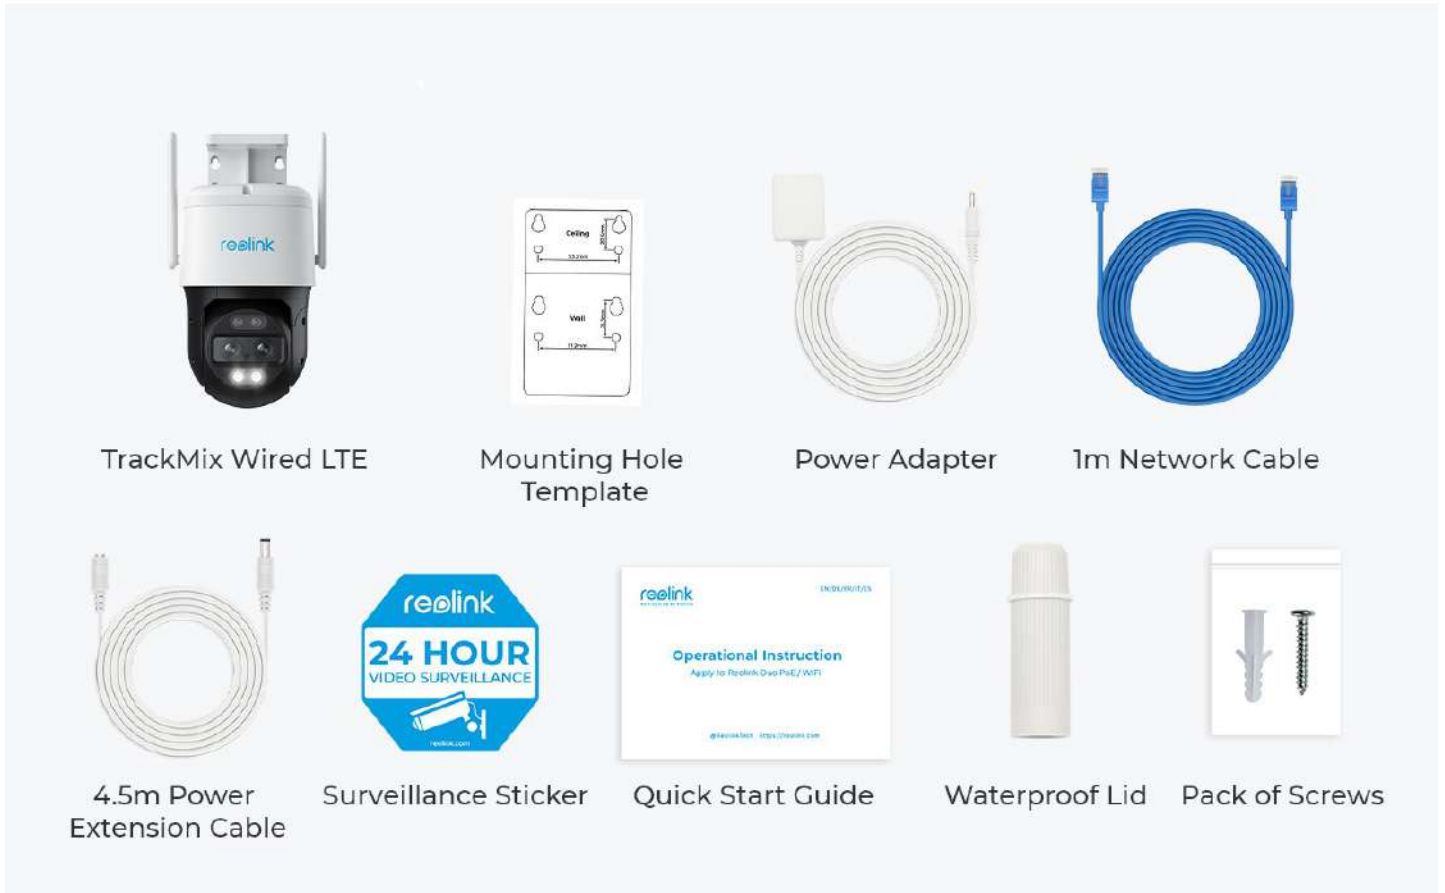

**Office Line**  
+6 03-8066 8482  
+6 03-8060 2818



**Hot Line**  
+6 019-348 1168  
+6 013-234 6821






**Email**  
sales@vshgroup.com.my



**Address**  
No.93, Jalan BP 7/2, Bandar Bukit Puchong, 47120 Puchong, Selangor.



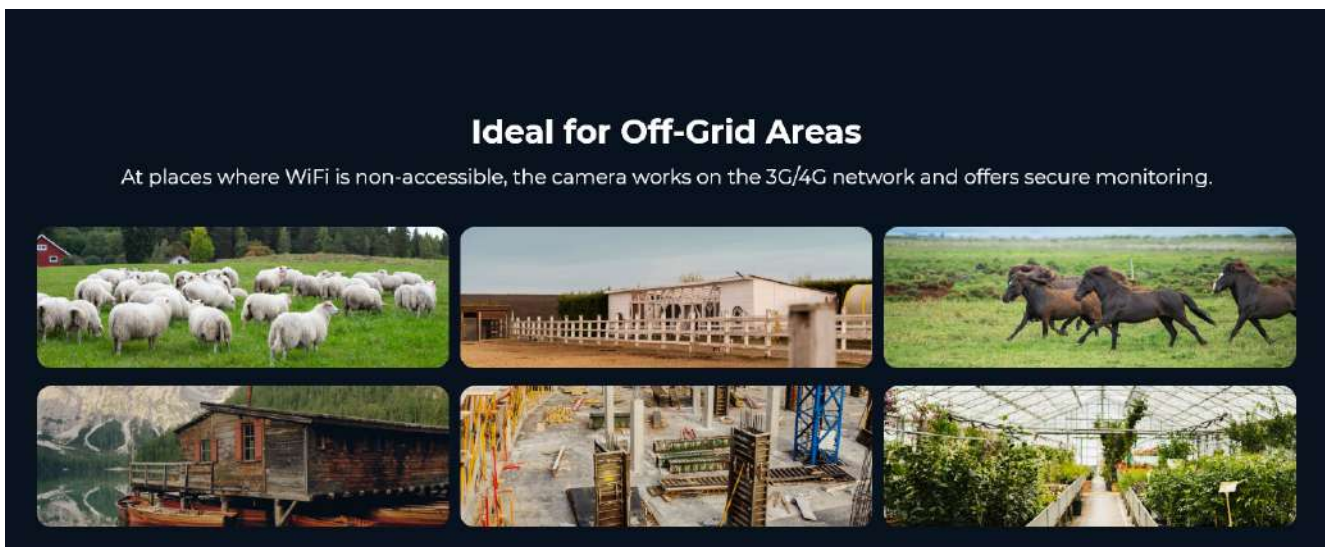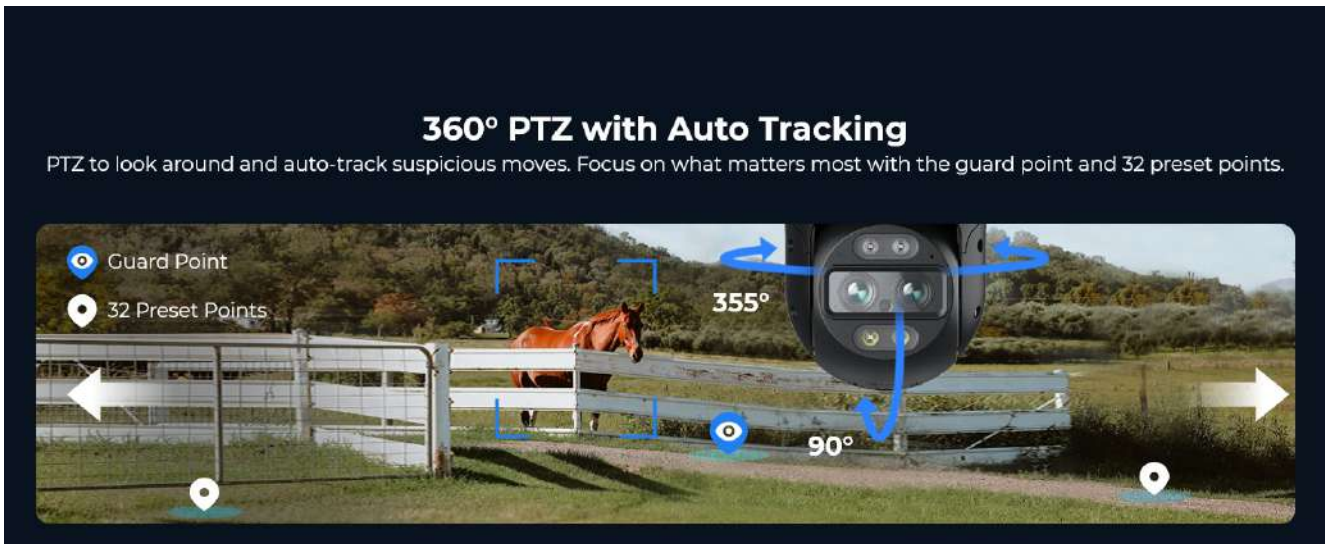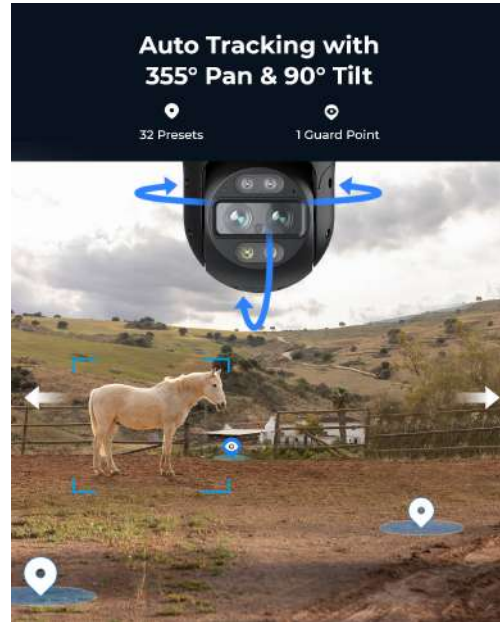

### Get Connected Easily

WiFi is not supported and the nano SIM card should be purchased separately.



1. Insert a nano SIM card and turn on the camera.



Network connection succeeded.

2. Wait for about 30s to see the status light in solid blue and hear the prompt.



3. Scan the QR code and follow the instructions on the software.

### Real-Time Alerts & Deterrents

Sends you motion alerts via email & app push and deters intruders with the motion spotlight and customizable siren.



### Smart Detection & Motion Zones

Records events and sends you alerts when people/cars/pets intrude the detection zone. Focus on what really matters.

