

### DETAILS:

It support 2 channel video signal in one coaxial cable by way of frequency division multiplexer, with all data transmission real time and all image high definition and non-delay. It is suitable for improvement of old projects and building under new projects.


### FEATURES:

- ☑ It is design according to projects with minimum installation volume requirement.
- ☑ 2CH video in one coaxial cable transmission
- ☑ Is easy for multi-channel signals transmission only in on coaxial cable without any delay and interference.
- ☑ Perfect support coaxial video line. 75-3, 75-5 RG59 wire, etc.

### SPECIFICATION:

Compatible Mode	HDCV/HDTV/AHD/CVBS
Interface	BND port
Power Supply Input	DC12V
Transmission Distance	0-400M Adaptive
Operating Temperature	-30°C~50°C
Shell Material	High Quality Aluminium Alloy
Product Weight	67.5 g
Product Size	64 x 43 x 23 mm

### DIAGRAM:

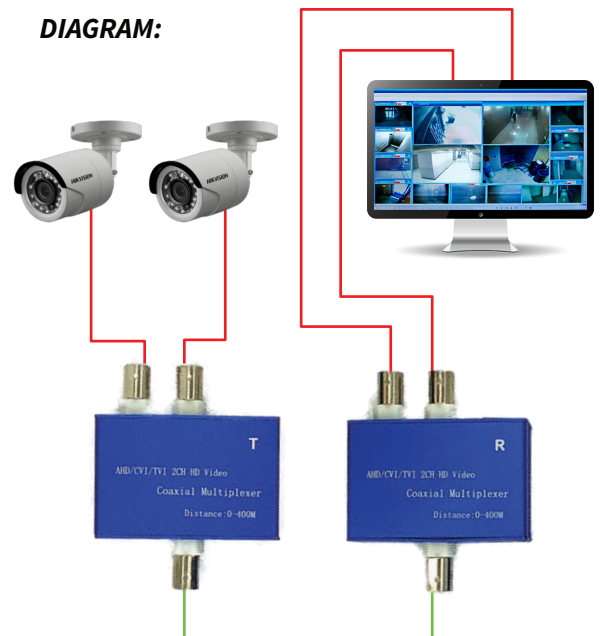

Single core coaxial cable SYV75-5-10-400M adaptive adjustment

