

## DS-K1T673DX Pro Face Access Terminal



Face recognition terminal is a kind of access control device. It can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.

- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration < 0.2 s/User
- Face recognition accuracy rate ≥ 99%
- Built-in M1 card, Felica card, and DESfire card reading module (Presents card on the screen to authenticate)
- Face mask detection
- 10,000 face capacity, 10,000 fingerprint capacity (With fingerprint module), 50,000 card capacity, and 150,000 event capacity
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6)
- Supports single person and multiple people (Up to 5 people) recognition

## □ Specification


<b>Display</b>	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	IPS
Resolution	600 × 1024
<b>Video</b>	
Lens	2
Resolution	2 MP
FOV	HFOV= 75.5°; VFOV= 41.5°; DFOV= 87°
<b>Audio</b>	
Audio quality	Built-in omnidirectional microphone
<b>Network</b>	
Wired network	Support
<b>Interface</b>	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1
Wiegand	RS-485 (Half duplex, HIKVISION). Supports OSDP protocol, Baud 9600, 19200, 38400
USB	1 Wiegand(Hik 26bit,Hik 34bit) 1 (For Module)
Audio output interface	1 (3.5 mm)
<b>Authentication</b>	
Card type	M1 card,DESfire card,Felica card
<b>General</b>	
Power supply	12 VDC to 24 VDC, 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (no condensing)
Protective level	IP 65
Dimensions	110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94")
Weight	Gross Weight: 1.06 kg (2.34 lb) Net Weight: 0.57 kg (1.26 lb)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Japanese, Korean, Traditional Chinese, French and Turkish
<b>Face Recognition Terminal</b>	
Fingerprint capacity	10,000 (With fingerprint module)
<b>Function</b>	
Face anti-spoofing	Support

## □ Available Model

DS-K1T673DX

DS-K1T673DX(ESD)  
 DS-K1T673DX/Singapore/RJ  
 DS-K1T673DX/Singapore

□ **Dimension**

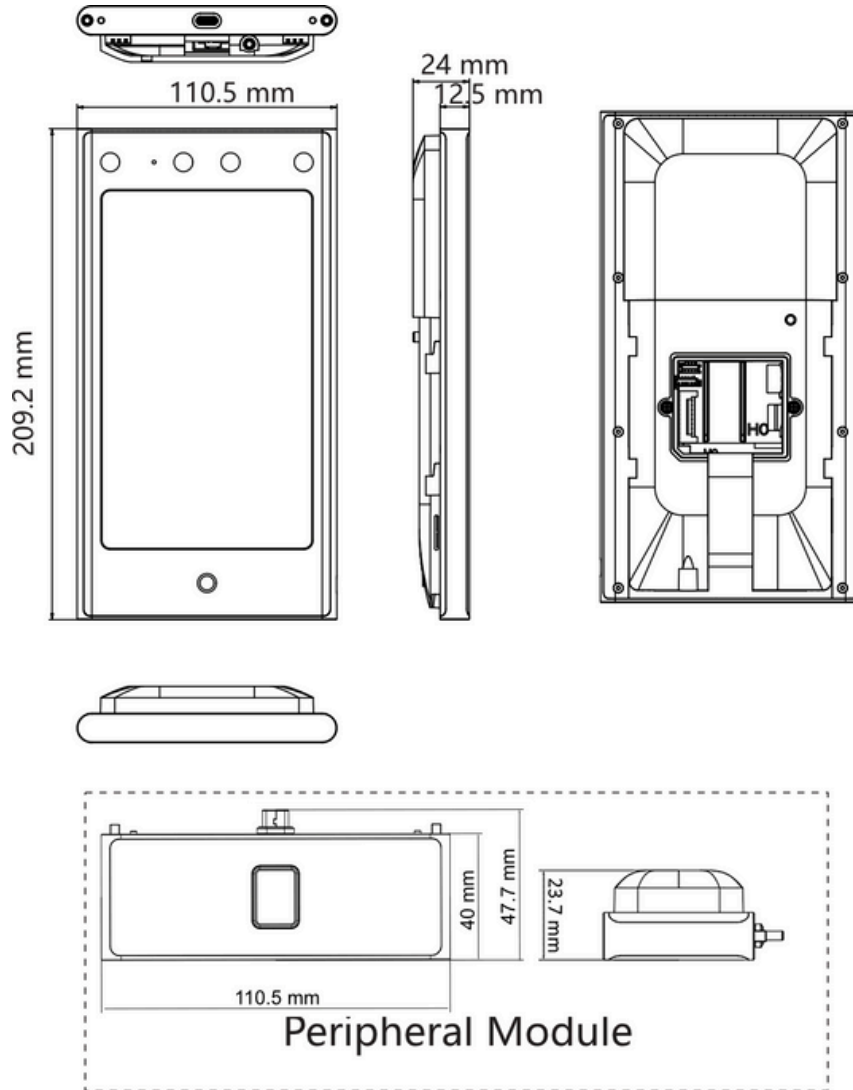

□ **Accessory**  
 □ **Optional**

DS-KAB673-S1	DS-KAB6-ZU3	DS-KAB673-A	DS-KAB673-P	DS-KAB673-EDB
DS-KAB673-B	DS-KAB6-W1	DS-KAB673-FBQR	DS-KAB6-D1	DS-KAB6-ZU1

