


Reolink-Duo-2-LTE-IP-Security-Camera-Specifications		
	Model	Reolink Duo 2 LTE 4G
Video & Audio	Image Sensor	1/3" CMOS Sensor
	Video Resolution	4608 x 1296 (6.0 Megapixel) at 15 frames/sec
	Video Format	H.265
	Field of View	Horizontal: 170°; vertical: 50°; diagonal: 180°
	Infrared Night Vision	30 meters (LED: 6pcs/20mil/850nm)
	Color Night Vision	Spotlights: 8pcs/4.4W/6500K/440 lumens
	Digital Zoom	6X digital zoom
	Audio	Two-way audio
PIR Detection & Alerts	Smart Alarm	PIR detection; person detection; vehicle detection; pet detection (beta)
	PIR Detecting Distance	Adjustable up to 10m (33ft)
	PIR Detecting Angle	170° horizontal
	Audio Alert	Customizable verbal alerts
	Recording	Motion-triggered recording
	Other Alerts	Instant email alerts and push notifications
3G/4G	Frequency Bands	European version: LTE FDD: B1/B3/B7/B8/B20/B28A; WCDMA: B1/B8
		American version: LTE FDD: B2/B4/B12; WCDMA: B2/B4/B5
		Australian version: LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28 LTE TDD: B40 WCDMA: B1/B2/B5/B8
	Transmission Data	LTE FDD: Max. 10Mbps (DL), Max. 5Mbps (UL)
LTE TDD: Max. 8.96Mbps (DL), Max. 3.1Mbps (UL)		
HSPA+: Max. 42Mbps (DL), Max. 5.76Mbps (UL)		
UMTS: Max. 384Kbps (DL), Max. 384Kbps (UL)		
Power	Battery	10400mAh rechargeable battery (battery life varies, based on settings, usage & temperature)
	Solar	Reolink Solar Panel
	DC Power	5V/2A USB Type-C
Storage	Local Storage	Micro SD card slot (supports up to 128GB)
	Cloud Storage	Supports Reolink Cloud (available in some countries)
Working Environment	Operating Temperature	-10°C to 55°C (14°F to 131°F)
	Weather Resistance	IP66 waterproof
Size & Weight	Size	228 x 132 x 120 mm
	Weight	900g
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .



Gallery & Specs

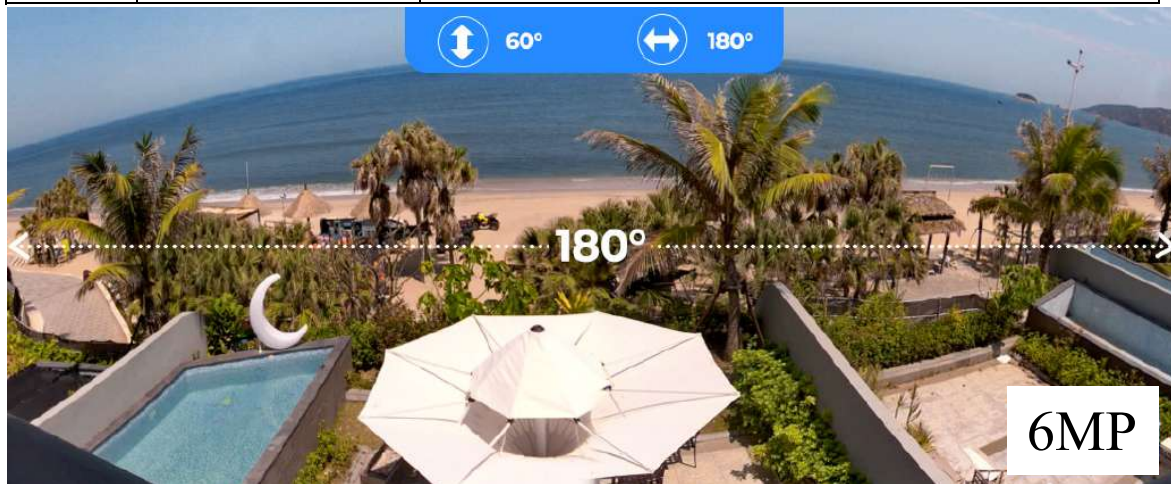

0 Antenna
E) IRLED

f) Lens
(;)Mic

9 DaylightSensor
f) PIRSensor

0 Spotlight
Q Mounting Bracket



0 Speaker
0 PowerSwitch

f) SIM CordSlot

9 MicroSD CordSlot

0 ResetButton

What's in the Box -



Office Line
+6 03-8066 8482
+6 03-8060 2818



Hot Line
+6 019-348 1168
+6 013-234 6821



Email
sales@vshgroup.com.my



Address
No.93, Jalan BP 7/2, Bandar Bukit
Puchong, 47120 Puchong, Selangor.



Larger Size, Higher Efficiency
(Max. 960mA, 6W)



6W Solar Panel-White

3W Solar Panel-White



Compare Solar Panel		
21*17.5*15.4 cm	Dimensions:	18.5*12*6.5 cm
6W	Power	3W
USB Type-C	Interface	Micro USB
960mA	Current	530mA
6V	Voltage	6V
<input checked="" type="checkbox"/>	Strap	<input type="checkbox"/>
14°F~131°F	Working Temperature	14°F~131°F

