




Wireless, Worry Less & Works Without WiFi or Power Outlets

Reolink Go Plus is a small sized portable battery camera with 4G LTE. Bring it to any places and you get person/vehicle detection 33ft night vision, two-way audio and more.

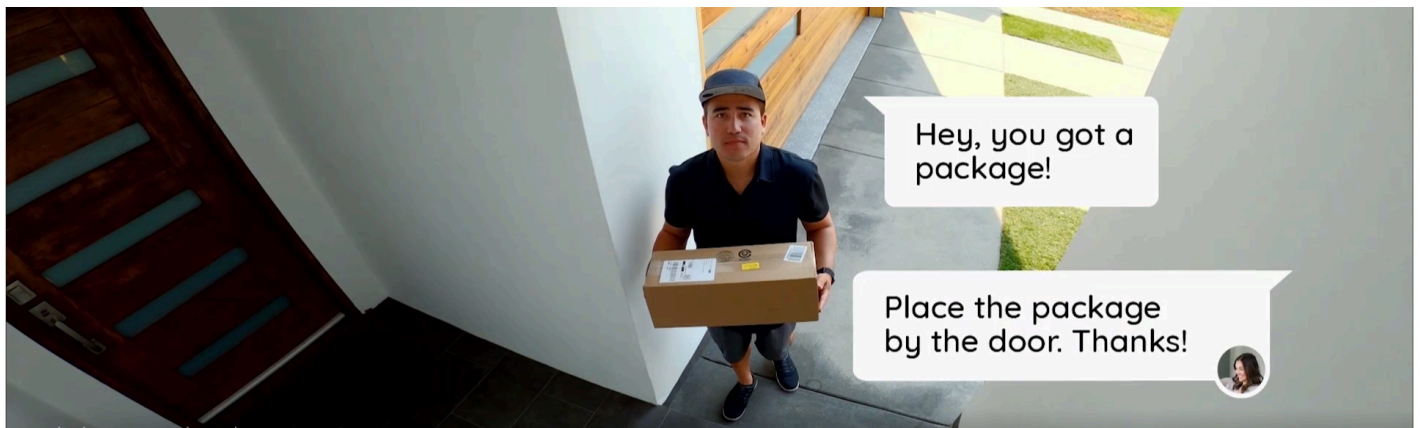

New Smart Detection Tech

With the on-camera technology of analysing person and vehicle shapes, Reolink Go Plus offers accurate detection and thus greatly reduces the false alarms on trivial objects' movement

Talk Like You're Here

Built-in mic & speaker allow you to listen and talk back to whoever the camera catches in real time.



Office Line
+6 03-8066 8482
+6 03-8060 2818



Hot Line
+6 019-348 1168
+6 013-234 6821




Email
sales@vshgroup.com.my




Address
No.93, Jalan BP 7/2, Bandar Bukit
Puchong, 47120 Puchong, Selangor.



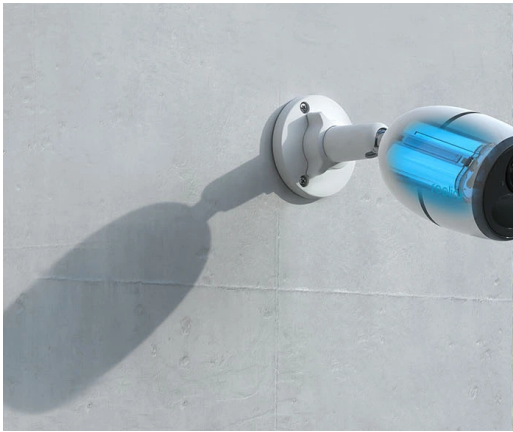

Rechargeable Battery

No need to connect the camera to a power outlet, which may not be reachable. Just charge it with its battery and you can have it working for a long time

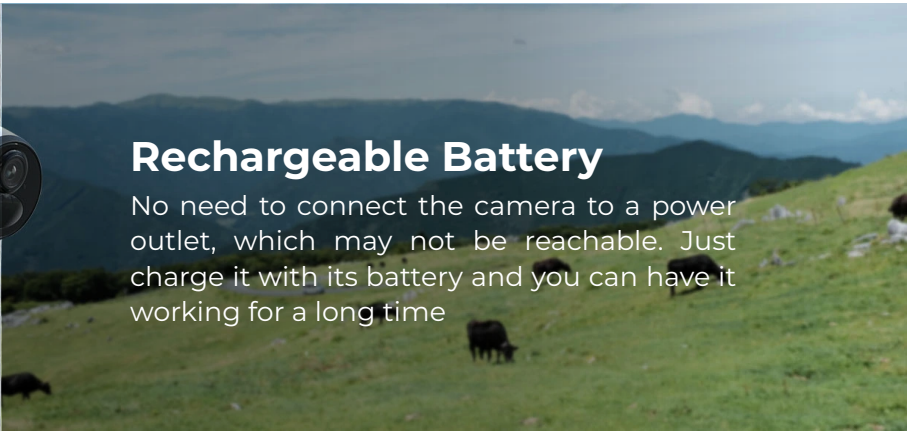

Solar Panel

This battery camera can also be connected to a Reolink solar panel for a non-stop power supply. It is easy to install and strongly weather resistant.



Product Specs



1. Micro SD Card Slot
2. SIM Card Slot
3. Reset Hole
4. Battery Status LED



Office Line
+6 03-8066 8482
+6 03-8060 2818



Hot Line
+6 019-348 1168
+6 013-234 6821



Email
sales@vshgroup.com.my



Address
No.93, Jalan BP 7/2, Bandar Bukit
Puchong, 47120 Puchong, Selangor.



Reolink-Go-Plus-Camera-Specifications		
	Model	Reolink Go Plus
Video & Audio	Image Sensor	1/3" CMOS Sensor
	Video Resolution	2560 x 1440 (4.0 megapixel) at 15 frames/sec
	Video Format	H.265
	Field of View	Fixed lens, horizontal: 95°; vertical: 52°; diagonal: 115°
	Infrared Night Vision	up to 10 meters (33ft) (LED: 6pcs/14mil/850nm)
	Digital Zoom	16x digital zoom
	Audio	Two-way audio
PIR Detection & Alerts	Smart Alarm	PIR detection/person detection/vehicle detection
	PIR Detecting Distance	Adjustable up to 10m (33ft)
	PIR Detecting Angle	120° horizontal
	Audio Alert	Customizable verbal alerts
	Recording	Motion triggered recording
	Other Alerts	Instant email alerts and push notifications
3G/4G	Frequency Bands	Europe Version: LTE FDD: B1/B3/B5/B7/B8/B20 WCDMA: B1/B5/B8
		America Version: LTE FDD: B2/B4/B12 WCDMA: B2/B4/B5
		Australia Version: LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28 LTE TDD: B40 WCDMA: B1/B2/B5/B8
	Transmission Data	LTE FDD: Max. 10Mbps(DL), Max. 5Mbps(UL)
		LTE TDD: Max. 8.96Mbps(DL), Max. 3.1Mbps(UL)
		HSPA+: Max. 42Mbps(DL), Max. 5.76Mbps(UL)
		UMTS: Max. 384Kbps(DL), Max. 384Kbps(UL)
Power	Battery	7800mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)
	Solar	Reolink Solar Panel
	DC Power	5V/2A USB power adapter
Storage	Local Storage	Supports up to 128GB micro SD card
	Cloud Storage	Supports Reolink Cloud (available in some countries)
Smart Home	Smart Home	Works with Google Assistant
Working Environment	Operating Temperature	-10°C to 55°C (14°F to 131°F)
	Weather Resistance	IP65 weatherproof
Size & Weight	Size	Φ75 x 194mm (2.95 x 7.63 in)
	Weight (Battery Included)	450g (15.9oz)
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .



Office Line
+6 03-8066 8482
+6 03-8060 2818



Hot Line
+6 019-348 1168
+6 013-234 6821



Email
sales@vshgroup.com.my



Address
No.93, Jalan BP 7/2, Bandar Bukit
Puchong, 47120 Puchong, Selangor.

