



- Compact size, waterproof, heavyload, easy construction, etc.
- Can be use indoors or outdoors.
- The max load is 150KG, the optional RG-AT180-UG 1 tow 1 unit or optional 1 tow 2 unit.
(Automatically sensing the passing direction of pedestrians and opening the door with the pedestrian walking direction)

*All image and specification is subject to change without prior notice.



Technical Data	RG-AT180UG-S	RG-AT180UG-D
Configuration	One Motor	Two Motor
Max Door Weight	150kg	150kg x2
Max Door Width	1200mm	1200mm x2
Max Torque	165Nm	
Unit Weight	5.5kg	5.5kg x2
Installation Method	Ground embedding	
Running Noise	<60dB	
Electric Lock Output	DC12V NO / NC	
Opening/Closing Time	6-12S	
Opening Range	-90°~90°	
Power Supply	AC220V±10%, 50/60Hz	
Rated Power	55W	55W x2
Standby Power	<2W	<2W x2
Working Temperature	-20~+55°C	
Protection Level	IP68	
Unit Size	330 x 130 x 100 (mm)	330 x 130 x 100 (mm) x2



Office Line
+6 03-8066 8482
+6 03-8060 2818



Hot Line
+6 019-348 1168
+6 013-234 6821




Email
sales@vshgroup.com.my



Address
No.93, Jalan BP 7/2, Bandar Bukit
Puchong, 47120 Puchong, Selangor.



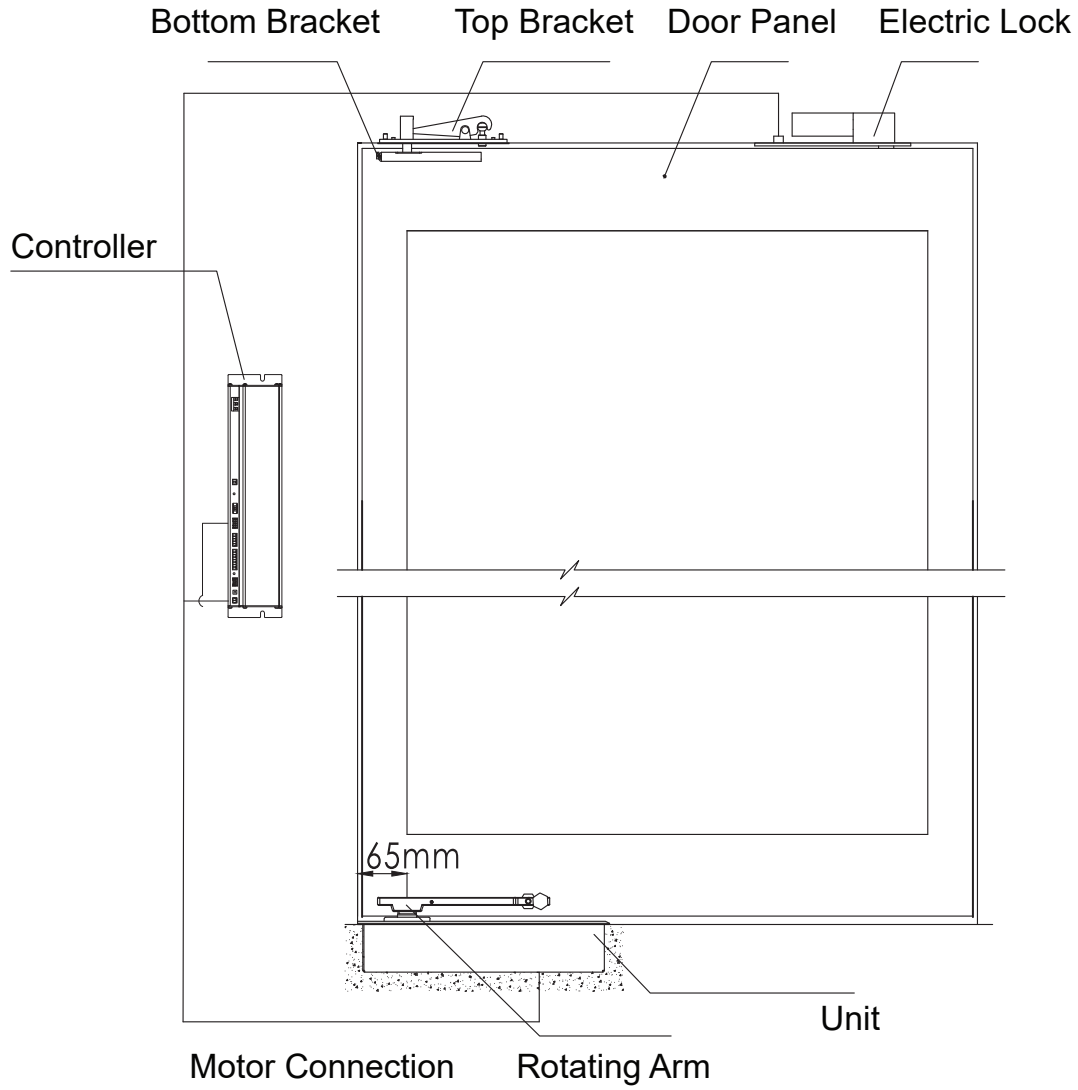

Office Line

+6 03-8066 8482
+6 03-8060 2818



Hot Line

+6 019-348 1168
+6 013-234 6821



Email

sales@vshgroup.com.my



Address

No.93, Jalan BP 7/2, Bandar Bukit
Puchong, 47120 Puchong, Selangor.

