


Reolink Solar Panel



Works only with Reolink battery-powered Cameras

NON-STOP POWER SUPPLY: Connects Reolink Solar Panel to Reolink solar-powered security camera to get non-stop power from the sun. With just a few hours of sunlight will make camera powered day and night.

WEATHER-RESISTANT: Weatherproof design to withstand rough weather conditions: more durable, long-lasting and cost effective

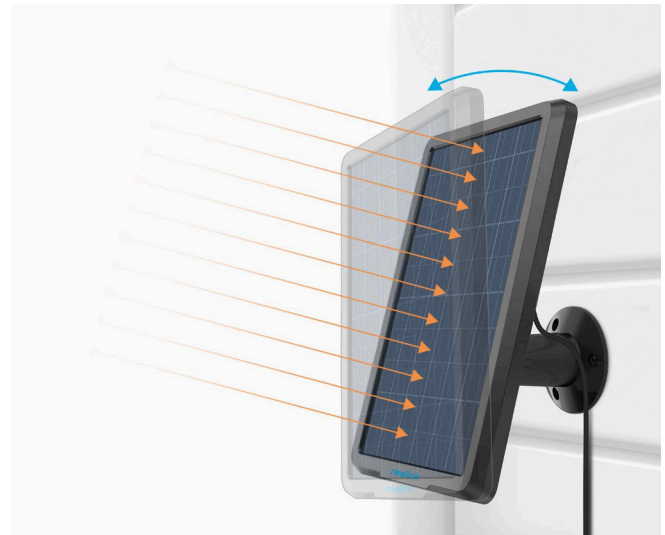

Adjustable Mounting Bracket to Adsorb Sun Light

EASY INSTALLATION: Adjustable mounting bracket allows you to easily position the solar panel and ensure maximal sun light exposure.

COMPATIBLE WITH REOLINK CAMERA: Designed for Reolink Camera rechargeable battery camera and provides continuous charging for Reolink camera.

Model Specification

Size		Standard Intensity of Electrical Parameter	
Item	Specification	Item	Specification
PCB Thickness (mm)	0.2mm	Solar Cell	Poly
Back side colour	Black	Parameter	Voltage (V) \pm 8% Current (mA) \pm 8%
Single cell size (mm)	52 x 26.5mm \pm 0.05mm	Voc (V)	7.2V
PCB size (mm)	NA	Isc (mA)	0.5A
Thickness (mm)	4.5mm \pm 0.4mm	Vmp (V)	6V
Module size (mm)	180 x 115mm \pm 0.3mm	Imp (mA)	0.48A
Encapsulation Craft	Frosted Glass	Power (w)	2.88w
Cut Craft	By hand	Efficeincy	18.2%



Weather-resistant

For Reolink Argus 2 / Argus Pro/ Reolink Go