

ViewSonic  LCD DISPLAY
VA3209-MH


Key Features

- SuperClear® IPS panel
- Full HD 1080p resolution
- 3 side borderless bezel
- 75hz Variable Refresh Rate
eliminates screen tearing and reduce stuttering
- Eye-care technology for comfortable viewing



Product Description

The ViewSonic VA3209-MH is a 32" Full HD monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering is delivered through adaptive sync, eye-care technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at a low power consumption.

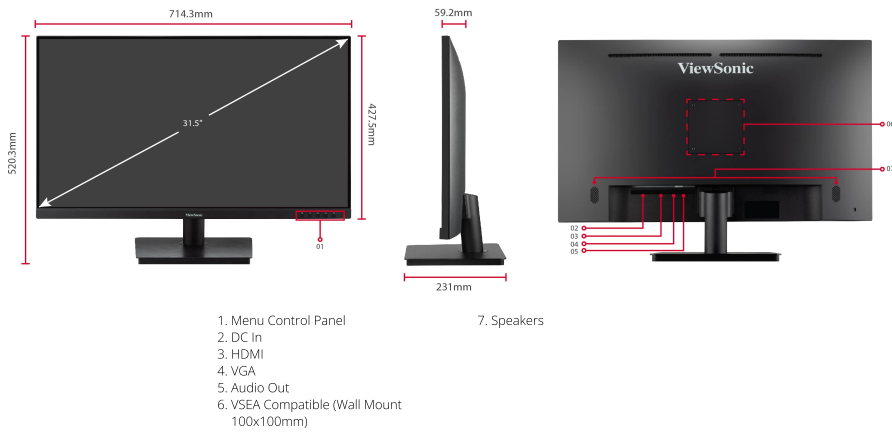

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,200:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Response Time (GTG w/OD):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Variable Refresh Rate Technology:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.364 mm (H) x 0.364 mm (V)
Surface Treatment:	Anti-Glare (Semi-Glossy), Hard Coating (2H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2.5Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	23W
Eco Mode (optimized):	27W
Consumption (typical):	32W
Consumption (max):	35W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 86KHz
Frequency Vertical:	48 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMD5 - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	16.1
Net Without Stand (lbs):	13.4
Gross (lbs):	20.3

WEIGHT (METRIC)

Net (kg):	7.3
Net Without Stand (kg):	6.1
Gross (kg):	9.2

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	30.3 x 20.1 x 4.9
Physical (in.):	28.1 x 20.5 x 9.1
Physical Without Stand (in.):	28.1 x 16.8 x 2.3

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	770 x 510 x 125
Physical (mm):	714 x 520 x 231
Physical Without Stand (mm):	714 x 428 x 59

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, BIS
PACKAGE CONTENTS:	VA3209-MH x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
PACKAGE CONTENTS (VSI):	VA3209-MH x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
PACKAGE CONTENTS (VSE):	VA3209-MH x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
PACKAGE CONTENTS (VSA):	VA3209-MH x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
PACKAGE CONTENTS (VSCN):	VA3209-MH x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market