

ViewSonic® LCD DISPLAY **VG2455**



Key Features

- USB Type-C
- Frameless bezel
- SuperClear® IPS technology
- HDMI, DisplayPort and VGA inputs
- vDisplay Manager (free download)



Product Description

The ViewSonic VG2455 is a 24" (23.8" viewable) 1080P IPS monitor designed to fit the modern office space. The monitor comes with a built-in USB Type-C port. Charge and display content simply via a single cable from your device, enabling connection to your laptop through a single USB cable and keeping your workstation neat while also functioning as a docking monitor. In addition, the monitor is equipped with DisplayPort, HDMI, VGA, and three USB Type-A ports to expand your efficiency. The three-sided frameless bezel design lets you enjoy an uninterrupted view of content across multiple monitors. An advanced ergonomic design offers the widest range of adjustments available for maximum comfort; including pivot, swivel, height adjustment, and an impressive 40° tilt, allowing you to use the monitor while standing or have strategic group discussions around the screen. The packaging is environmentally friendly and offers quick and easy setup, making the VG2455 monitor perfect for business environments.

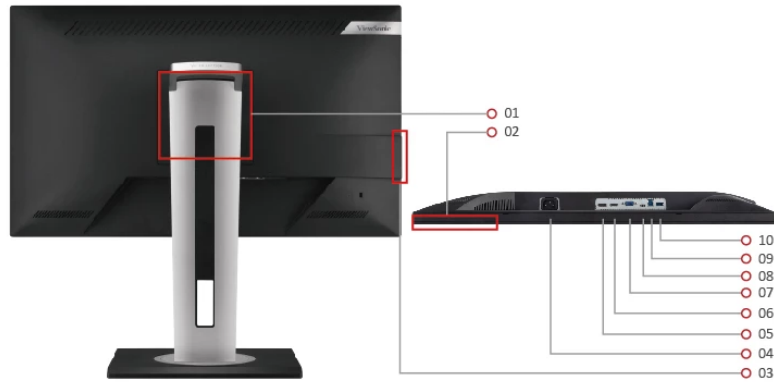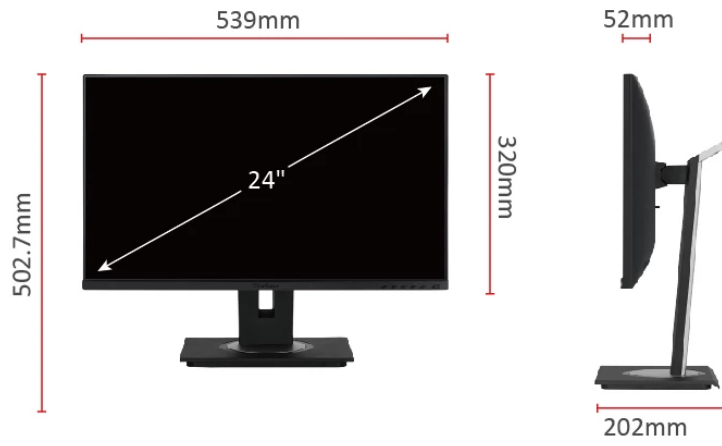

- 1. VESA Compatible
(Wall Mount 100 x 100 mm)
- 2. Menu Control Panel
- 3. USB 3.1 down stream x 2

- 4. AC In
- 5. DisplayPort
- 6. HDMI
- 7. VGA

- 8. USB Type C
- 9. USB 3.1 up stream
- 10. USB 3.1 down stream

- 1. VESA Compatible (Wall Mount 100 x 100 mm)
- 2. Menu Control Panel
- 3. USB 3.1 down stream x 2
- 4. AC In
- 5. DisplayPort
- 6. HDMI
- 7. VGA
- 8. USB Type C
- 9. USB 3.1 up stream
- 10. USB 3.1 down stream

Visit Us ■ www.viewsonic.com

DISPLAY

Monitor Size:	24" (23.8" viewable)
Panel Technology:	IPS Technology
Resolution:	1920 x 1080
Display Area:	527 mm x 296.5 mm
Aspect Ratio:	16:9
Brightness:	250 cd/m ² (Typ)
Contrast Ratio:	1000:1 (Typ)
Dynamic Contrast Ratio:	50,000,000:1
Viewing Angles:	178 degrees / 178 degrees (Typ)
Response Time:	GtG(Recommend; typ; ms): 5ms
Refresh Rate (Hz):	60
Response Time:	GtG(Recommend; typ; ms): 5ms

INPUT SIGNAL

Frequency:	24 ~ 82KHz ; Fv = 50 ~ 75Hz,
Sync:	Separate/Composite/SOG, TMDs,PCI-E, Micro-Packet

COMPATIBILITY

PC:	Windows 7/8/8.1/10 certified
Mac®:	macOS tested

CONNECTOR

Input:	VGA In x1, HDMI In(1.4) x1, DisplayPort In(1.2) x1, USB Type C (Up Stream; DisplayPort Alt mode) (3.1) x1, USB Type B (Up Stream)(3.1) x1, USB Type A (Down Stream; 900mA)(3.1) x3
--------	--

AUDIO

Speaker:	2W x 2
----------	--------

USB

Upstream:	USB Type C (Up Stream; DisplayPort Alt mode) (v 3.1) x 1 USB Type B (Up Stream) (v 3.1) x 1
Downstream:	USB Type A (Down Stream; 900mA) (v 3.1) x 3

POWER

Power:	3-pin Socket (IEC C14 / CEE22)
Voltage:	AC 100-240V (Universal); 50/60Hz
Consumption:	17.8W
Optimise:	14.4W
Conserve:	11.9W

ERGONOMICS

Tilt:	40 ~ -5 degrees
Swivel:	60 ~ -60 degrees
Pivot:	90 ~ -90 degrees
Height Adjustment:	130mm

WALL MOUNT

VESA®:	100mm x 100mm
--------	---------------

OPERATING CONDITIONS

Temperature (° F / ° C):	32°F to 104°F (0°C to 40°C)
Humidity:	20% to 90% (no condensation)

DIMENSIONS (W X H X D) (MM)

Physical with stand (mm):	539mm (W) x 406~512mm (H) x 202mm (D)
Physical without stand (mm):	539mm (W) x 320mm (H) x 52mm (D)
Packaging (mm):	595mm (W) x 210mm (H) x 396mm (D)

WEIGHT

Net with stand:	6.4kg
Net without stand:	4kg
Gross:	9.4kg

REGULATIONS

cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, PSB, RCM, GEMS, CCC, China RoHS, China Energy Label

WARRANTY

Warranty offered may differ from market to market

PACKAGE CONTENTS

VG2455 x1
3-pin Plug (1.8M, IEC C13/CEE22) x1
USB A/B Cable (1.8M, v3.1; Male-Male) x1
Quick Start Guide x1
USB Type-C Cable(1.1M, Male-Male)