H25 WiFi Smart Door Lock with Face Recognition

We offer the smart and safe way to enter your home.
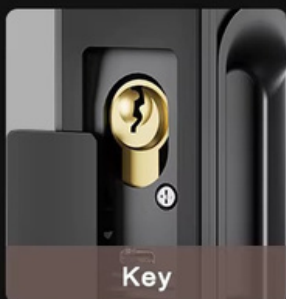

TTLOCK

Specification

- Aluminium alloy

- Black color

- Outdoor: 410(H) x 40(W) x 32(T) mm
  Indoor: 413(H) x 43.3(W) x 31.5 (T) mm

- 40-80mm door thickness

- 4 AA batteries

- Operating temperature -25ºC to 70ºC

- 50 face, 100 fingerprint, 100 password, 100 card data capacity

- Suitable for sliding aluminium door
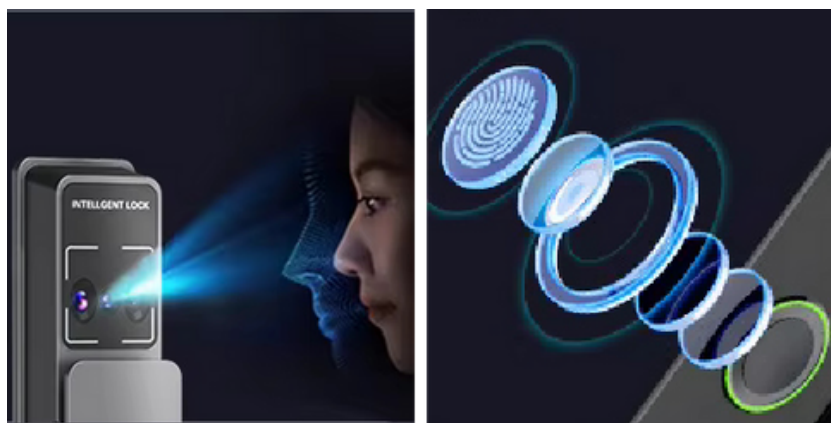
- One year warranty

Compatible with sliding aluminum doors.

Designed to withstand rain, dust and splashes.

Emergency unlock way

Key

Type C emergency power port

Supports live monitoring through mobile phone

- Real-time view of the screen outside the door. (24H Abnormal reminder)

- Temporarypassword unlock.

- Remote one-key unlock

- Built-in WiFi (TTLock App)

AI 3D Face Recognition

Swipe your face to open the door in a second and the whole family can use it.
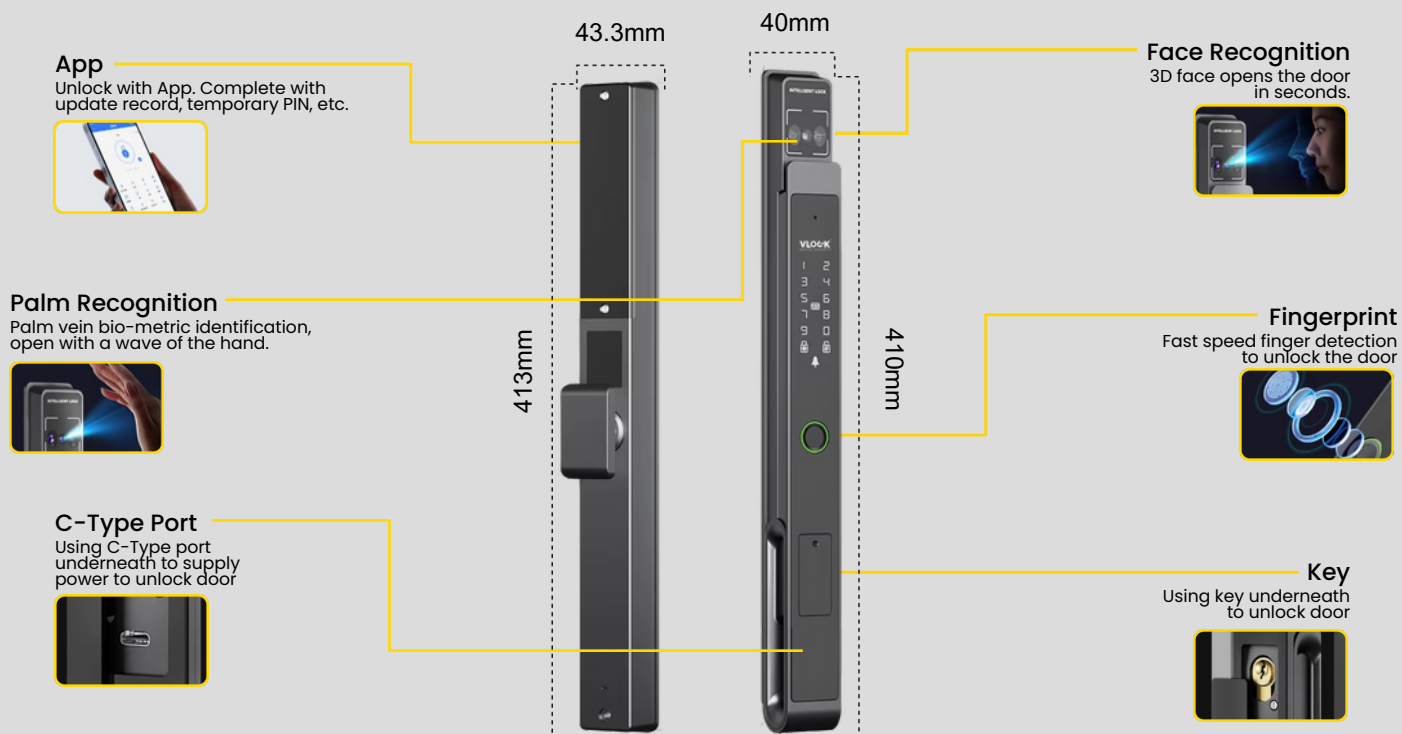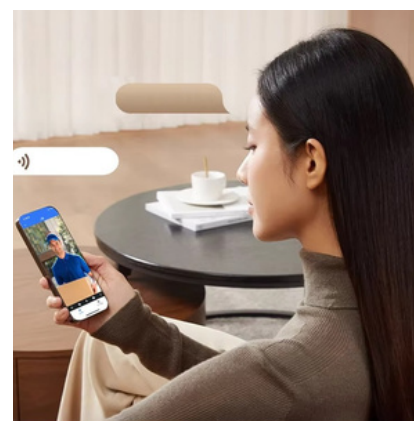
AI Fingerprint Recognition

Fast, accurate, and adaptive scanning—even with dry, wet, or aged fingers.

Palm Vein Technology

Palm vein bio-metric identification, open with a wave of the hand.

Two-way Voice Intercom

Communicate instantly via smartphone app, enable live voice conversations with visitors.

App
Unlock with App. Complete with update record, temporary PIN, etc.

Palm Recognition
Palm vein bio-metric identification, open with a wave of the hand.

C-Type Port
Using C-Type port underneath to supply power to unlock door

43.3mm

40mm

413mm

410mm

Face Recognition
3D face opens the door in seconds.

Fingerprint
Fast speed finger detection to unlock the door

Key
Using key underneath to unlock door

Additional Features

Security lockout
Security lockout after five incorrect attempts to ensure your property is always secure.

Auto relock
Five seconds after verification, the mortise will automatically relock, requiring verification again. Double lock needs to be done manually

Device volume
Can be enabled, disabled or adjusted to suit your preference

Share access
Access can be shared with people you trust

Control from everywhere
Need to add on G2 gateway device.