

# VS-SW302WP SWING BARRIER



Two Lane

Single Lane

## Functions & Features

- Reasonable and reliable design, low noise, smooth operation and long service life.
- With function of anti-fail, anti-reverse pass and go.
- Card can be set "with memory" or "without memory" function.
- With automatic reset function, i.e after having access to the gate, the gate automatically restores to the locked state if not pass within the time set.
- With infrared anti-clip function (anti-clip when gate is open or running).
- Compatible with IC, ID card, scanning and face recognition.
- Two modes of operation are available; open or closed.
- Various working modes are available, including two-way card reading and one-way card reading, etc.

## Application Scenarios



School



Museum



Factory




Gym

## Technical Parameter

Parameter	
Size (L*W*H)	1500*120*980mm
Pass width	600-900mm
Power	120W
Material	δ=1.5mm SUS304
Bar Material	10mm Clean Acrylic
Movement	Servo speed gate movement
Infrared sensor	12 pairs
Clutch	∅ =80mm
Indicator Light	RGB light
Drive Unit	Brushless servo Motor 100W
Power Supply	24V 500W
Control Unit	Servo control system
Communication Interface	Dry contact/ RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
Environment	Indoor and outdoor
Level Protection	IP54

## Dimension Diagram

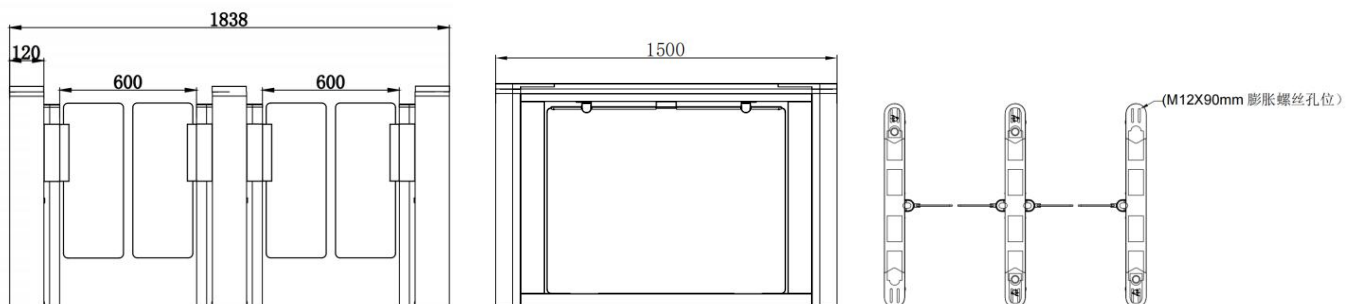

## Case Share

