


Key Features

- 4,000 ANSI Lumens offering bright images in any environment
- Larger screen size with lower cost-per-inch
- Throw ratio match & 1.3x zoom for hassle-free equipment upgrade
- Energy-efficient 20,000 hours lamp life
- Comprehensive LAN control for efficient management



Product Description

The ViewSonic PG707W is a 4,000 ANSI Lumens WXGA value business/education projector. With a throw ratio that matches mainstream installation conditions and 1.3x optical zoom, it serves as a hassle-free upgrade choice for users to easily get bright and large images with low cost-per-inch in small-to-medium meeting/training rooms. Adding on to that are the energy-efficient 20,000 hours long lamp life and comprehensive LAN control compatibility, making it even more favorable to cost-effective and efficient management.

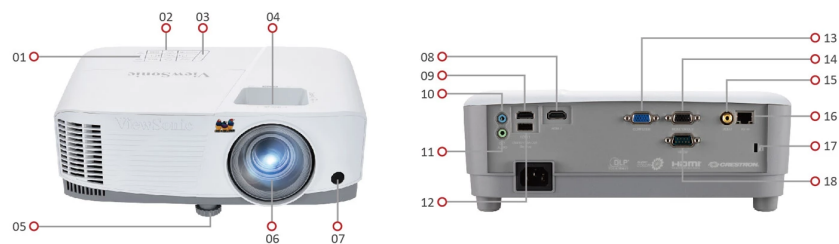

1. LED Indicator
2. Keypad
3. Power Key
4. Zoom/Focus Ring
5. Adjustment Foot
6. Lens
7. Front IR

8. HDMI 2
9. HDMI 1
10. Audio In
11. Audio Out
12. USB Type A(5V/1.5A)
13. Computer In
14. Monitor Out

15. Video
16. RJ45
17. Kensington Lock
18. RS232

SPECIFICATION

| | |
|-----------------------------------------------|--------------------------------------------|
| Native Resolution: | 1280x800 |
| DMD Type: | DC3 |
| Brightness: | 4000 (ANSI Lumens) |
| Contrast Ratio with SuperEco Mode: | 22000:1 |
| Display Color: | 1.07 Billion Colors |
| Light Source Type: | Lamp |
| Light Source Life (hours) with Normal Mode: | 6000 |
| Light Source Life (hours) with SuperEco Mode: | 20000 |
| Lamp Watt: | 203W |
| Lens: | F=2.59-2.87, f=16.88-21.88mm |
| Projection Offset: | 120%+/-5% |
| Throw Ratio: | 1.21-1.57 |
| Optical Zoom: | 1.3x |
| Digital Zoom: | 0.8x-2.0x |
| Image Size: | 30"-300" |
| Throw Distance: | 0.78m-10.14m, (100"@2.61m) |
| Keystone: | H: +/-40° , V: +/-40° |
| Audible Noise (Normal): | 32dB |
| Audible Noise (Eco): | 28dB |
| Input Lag: | 16ms |
| Resolution Support: | VGA(640 x 480) to FullHD(1920 x 1080) |
| HDTV Compatibility: | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility: | NTSC, PAL, SECAM |
| Horizontal Frequency: | 15K-102KHz |
| Vertical Scan Rate: | 23-120Hz |

INPUT

| | |
|-------------------------------------|------------------------|
| Computer in (share with component): | 1 |
| Composite: | 1 |
| HDMI: | 2 (HDMI 1.4/ HDCP 1.4) |
| Audio-in (3.5mm): | 1 |

OUTPUT

| | |
|---------------------|-------------|
| Monitor out: | 1 |
| Audio out (3.5mm): | 1 |
| Speaker: | 10W |
| USB Type A (Power): | 1 (5V/1.5A) |

CONTROL

| | |
|------------------------|---|
| RS232 (DB 9-pin male): | 1 |
| RJ45 (LAN control): | 1 |

OTHERS

| | |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Supply Voltage: | 100-240V+/- 10%, 50/60Hz , (AC in) |
| Power Consumption: | Normal: 280W, Standby: <0.5W |
| Operating Temperature: | 0~40°C |
| Net Weight: | 2.33kg |
| Dimensions (WxDxH) with Adjustment Foot: | 294x218x110mm |
| OSD Language: | English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages |

STANDARD ACCESSORY

| | |
|-----------------|------------------------|
| Power Cord: | 1 |
| VGA Cable: | 1 |
| Remote Control: | 1 , (w/ laser pointer) |
| QSG: | 1 |